


Product Description:

Model SN2297 is a foot mounted, two stage increasing, single output, high speed gearbox designed for test stand use where high input torque at low input speed is required. One such application is as a speed resolver between a test vehicle axle and load dynamometer. This gearbox has the input and output shaft extended through both sides to provide interface symmetry from either side of the gearbox.

POWER:	200 HP 8050 lb-ft at low speed shaft
OUTPUT SPEED:	8040 RPM max
RATIOS:	18.29 overspeed. Contact Cotta for other available ratios.
MAX ACCEL / DECEL RATE:	2000 RPM / sec at output
INPUT CONFIGURATION:	Keyed stub shaft is standard. Contact Cotta for optional inputs.
OUTPUT CONFIGURATION:	Double-key stub shaft is typical. Various other shafting outputs available.
ROTATION:	Input can be driven ccw or cw. Output rotates in the same direction as input.
LUBRICATION:	Positive delivery. Pump, heat exchanger, and necessary temp and pressure controls are furnished.
OPTIONS:	Accelerometers, speed pickup, and other application specific items can be accommodated or supplied.
APPROXIMATE WEIGHT:	1850 lbs.
STANDARD FINISH:	2-part polyurethane enamel



This drawing shows general arrangement and approximate space claim. Do not design or lay out using this drawing. Use only certified drawings provided by Cotta Engineering.

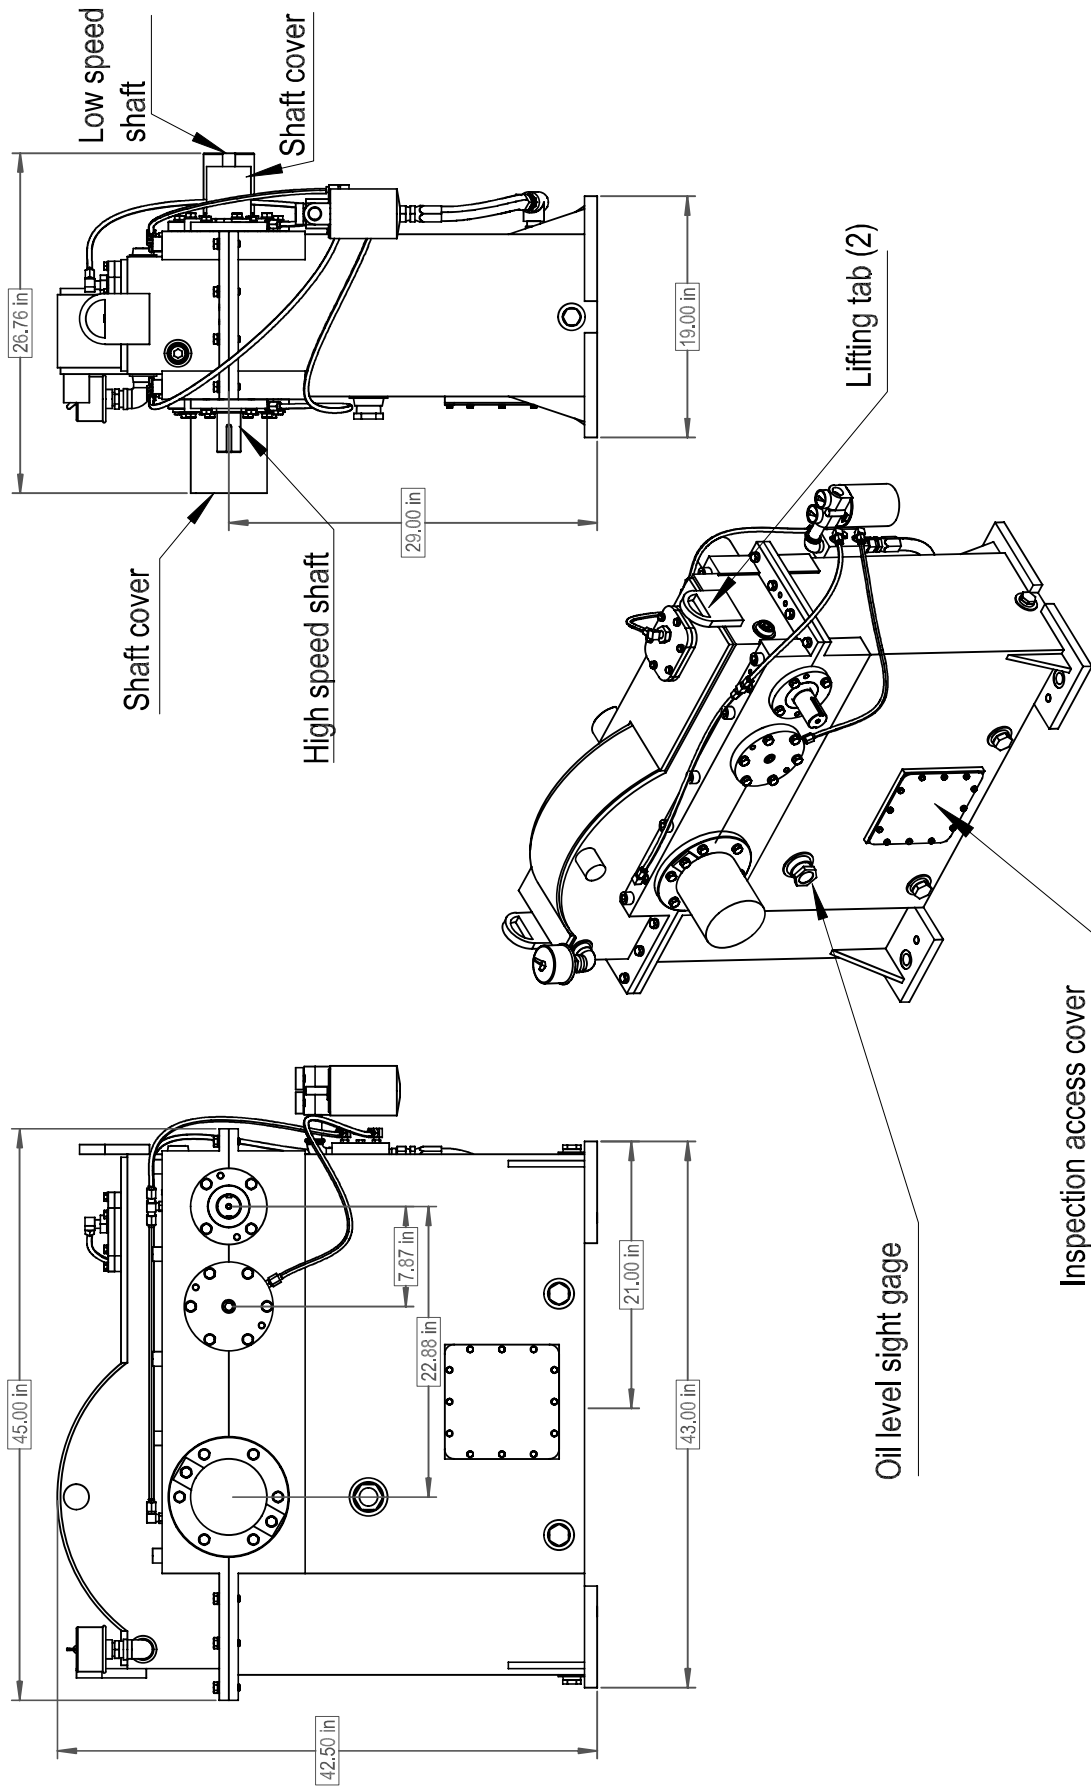

SN2297 DRW.